

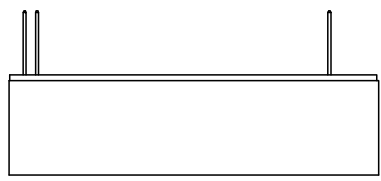


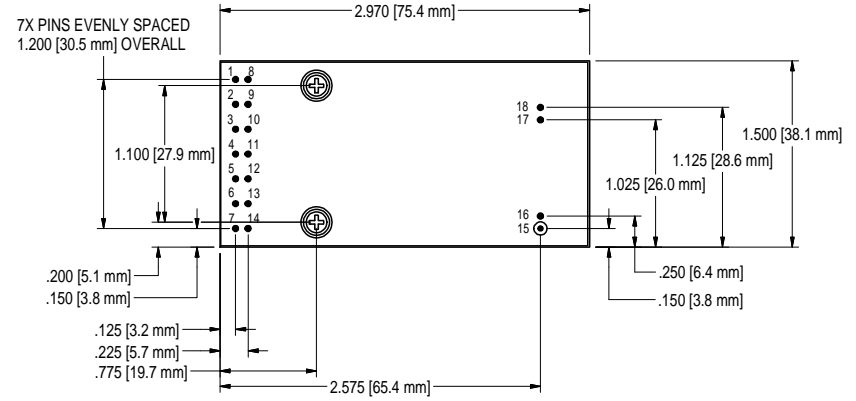

PROPRIETARY STATEMENT: ULTRAVOLT INC.  
CONFIDENTIAL DRAWING

REVISIONS				
REV	DESCRIPTION	BY	DATE	APPD
A	RELEASED TO DOC-CTRL	A.S.	12/23/2010	PM
B	REVISED PER EC-03062-JV	B.H.	9/6/2018	PM



- NOTES:
- 1- PINS:
    - 1.1- MATERIAL: GOLD PLATED 0.025 [0.64mm] SQUARE.
    - 1.2- PINS 1 THRU 7 AND 8 THRU 14 SPACING 0.200 [5.08mm] ON CENTER, HEIGHT FROM COVER 0.47 [11.9mm] MIN.
    - 1.3- PINS 15, 16 AND 17, 18 SPACING 0.100 [2.54mm] ON CENTER, HEIGHT FROM COVER 0.47 [11.9mm] MIN.
  - 2- MOUNTING:
    - 2.1- 2-56 X 0.30 [7.62mm] DP UNC-2B THD 2 PLACES.
    - 2.2- THREADED POST MAY NOT BE FLUSH TO COVER.
  - 3- CONSTRUCTION:
    - ENCAPSULANT FILLED DAP BOX CERTIFIED TO ASTM-D-5948.
  - 4- TOLERANCE:
    - 4.1- OVERALL +/-0.050 [1.27mm].
    - 4.2- PIN TO PIN +/-0.015 [0.38mm].
    - 4.3- MOUNTING HOLE LOCATION +/- 0.025 [0.64mm].
  - \*5- 20 & 30 WATT VERSIONS ARE AN ADDITIONAL 0.062 [1.57mm] IN HEIGHT.
  - \*6- -M EQUIPPED UNITS ARE AN ADDITIONAL 0.030 [0.76mm] IN HEIGHT.
  - 7- RoHS:
    - UNITS ARE RoHS COMPLIANT.

DASH NUMBER	NEXT ASSY	USED ON
APPLICATION		

UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES [mm]		CUSTOMER	
TOLERANCES ARE:		DRAWN	Adrian Siu
2 PL DEC ± .02	FRACT ± 1/64	DATE	3/17/2010
3 PL DEC ± .010	ANGLES ± 2°	CHKD	Stefanie Turek
		DATE	5/6/2011
HOLE DIA	TOLERANCES	MFG	N/A
.0135 THRU .125	+ .004 - .004	MFG ENGR	Gerry McLaren
.126 THRU .250	+ .005 - .005	PROCESS	N/A
.251 THRU .500	+ .006 - .006	QA	N/A
.501 THRU .750	+ .008 - .008	CHIEF ENG	Peter Match
.751 THRU 1.000	+ .010 - .010	DATE	5/4/2011
1.001 THRU 2.000	+ .012 - .012	CFN: OL-056_revA_AA-15-110_revB.lidw	

**ULTRAVOLT, INC.**  
1800 OCEAN AVE. FRNT, RONKONKOMA, N.Y. 11779  
1-631-471-4444

**OUTLINE,  
AA- I5/110 SERIES**

<b>B</b> PART NUMBER: OL-056	<b>REV</b> B
------------------------------	--------------

